


# MY SLOT NOTES

RESULT = Robert E Sult

For the best reSULT conSULT SULT

## *Kortek LCD power supply*

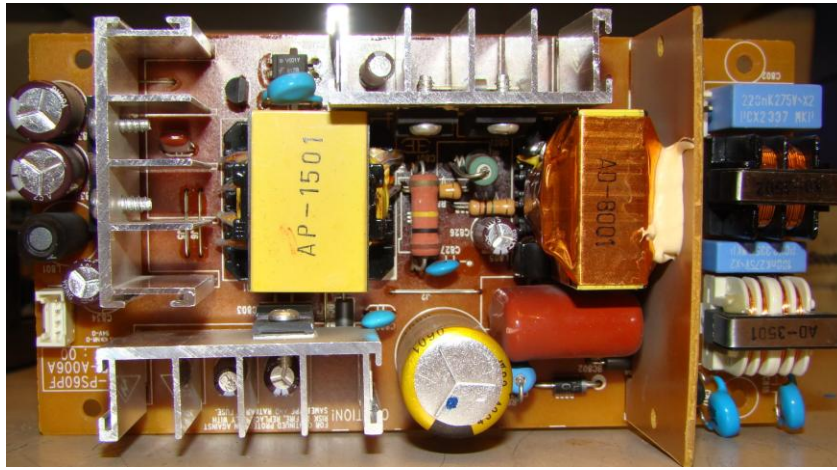

Kortek LCD Power supply

No Power – No 12 VDC

Most of the time you will find that C826 is bad.

I replace

C826 47uF 50V

C828 47uF 50V

C825 1uF 50V

C836 1uF 50V

C834 470uF 16V

-----

**NOTE- Power Supply with 12VDC – but will not work under load**

**Easy to find – When you power up the LCD and the Green LED is blinking.**

**Found replacing**

**C835 1000uF 25V**

**C837 1000uF 25V**

**Will fix that problem.**

-----

**Now I have had 2 – will be more as time goes on.**

**That show 0 (zero) volts –**

**Found that IC803 is bad**

**Replaced IC802 FS6M07652R**

**They are working fine now**



***Robert E. Sult AOS***

**Slot Technician / Bench Technician**

Associate in Occupational Studies Electronic Technology